

410RAED Series




300RAED;15000;1/4



410RAEDS;13000;1/4


410RAEDRSK;13000;1/4

Exhaust Direction	Lever Style	MODEL NUMBER	Exhaust Direction	Lever Style	MODEL NUMBER
Side	Standard Lever	300RAED;15000;1/4	Side	Standard Lever	410RAEDS;13000;1/4
	Safety Lever	300RAEDK;15000;1/4		Safety Lever	410RAEDSK;13000;1/4
Rear	Standard Lever	300RAEDR;15000;1/4	Rear	Standard Lever	410RAEDRS;13000;1/4
	Safety Lever	300RAEDRK;15000;1/4		Safety Lever	410RAEDRSK;13000;1/4

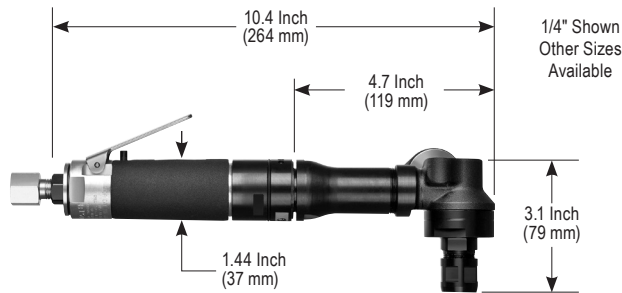

HP 0.7 H.P. (600 W) **cfm** 25 cfm (11.8 L/s) Max

Lbs 2.7 Lbs. (1.2 Kg) Aluminum
3.1 Lbs. (1.4 Kg) Steel **SUPPLY** 1/4" NPT Inlet
3/8" (10 mm) Hose Size

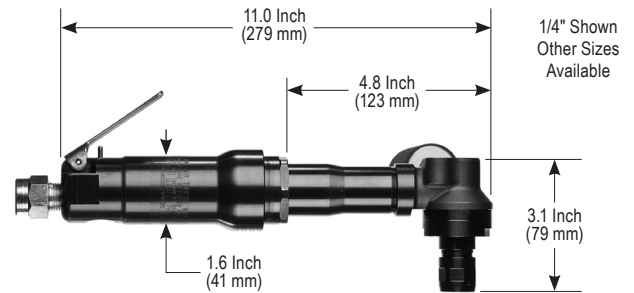

HP 1.2 H.P. (900 W) **cfm** 35 cfm (16.5 L/s) Max

Lbs 3.2 Lbs. (1.2 Kg) Aluminum
3.8 Lbs. (1.4 Kg) Steel **SUPPLY** 3/8" NPT Inlet
1/2" (13 mm) Hose Size


STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)




The ER Heavy Duty Collet is Standard Equipment on 300RAED & 410RAED Series.

300RAED Alternate Options

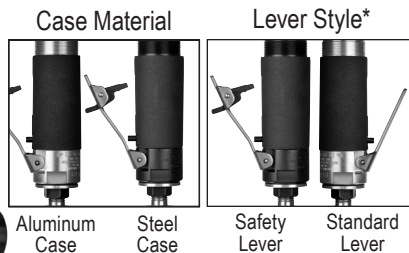

410RAED Alternate Options

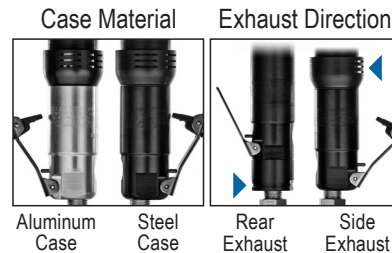

Abrasive Mounting



*APPLIES TO BOTH TOOL SERIES

WARNING: Follow all recommendations from component and abrasive manufacturers for speeds and proper usage.