

Extended Right Angle Sanders, Buffers & Polishers for Surface Finishing Abrasives

320RA Series



320RA6K;20000


420RA Series




420RA6R;13000

420RA6K;13000

Recommended Maximum Sanding Pad Size	Exhaust Direction	Lever Style	MODEL NUMBER	Recommended Maximum Sanding Pad Size	Exhaust Direction	Lever Style	MODEL NUMBER
2 Inch (50 mm)	Side	Standard Lever	320RA6;20000	2 Inch (50 mm)	Side	Standard Lever	420RA6;13000
		Safety Lever	320RA6K;20000			Safety Lever	420RA6K;13000
1/4-20 Spindle Output Thread	Rear	Standard Lever	320RA6R;20000	1/4-20 Spindle Output Thread	Rear	Standard Lever	420RA6R;13000
		Safety Lever	320RA6KR;20000			Safety Lever	420RA6KR;13000

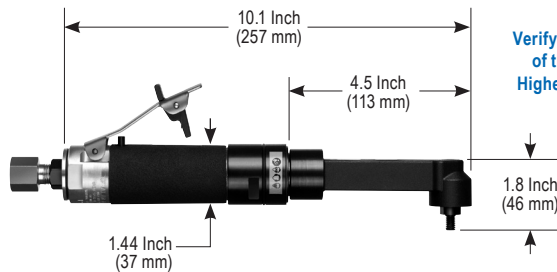

Verify the Maximum Rated Speed of the Sanding Accessory is Higher than the Maximum Rated Speed of the Tool.

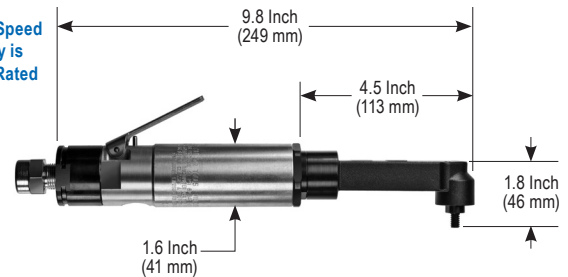

HP 0.7 H.P. (600 W)
Lbs 2.1 Lbs. (1.0 Kg) Aluminum
 2.5 Lbs. (1.1 Kg) Steel

cfm 25 cfm (11.8 L/s) Max
SUPPLY 1/4" NPT Inlet
 3/8" (10 mm) Hose Size

HP 1.2 H.P. (900 W)
Lbs 2.4 Lbs. (1.1 Kg) Aluminum
 3.0 Lbs. (1.4 Kg) Steel

cfm 35 cfm (16.5 L/s) Max
SUPPLY 3/8" NPT Inlet
 1/2" (13 mm) Hose Size

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

320RA Alternate Options



320-420RA Alternate Options



420RA Alternate Options



Surface Conditioning Abrasive Mounting

