

Short Right Angle Sanders, Buffers & Polishers for Surface Finishing Abrasives


347RA/340RA Series



347RA6K;12000

Recommended Maximum Sanding Pad Size	Rated Speed	Exhaust Direction	Lever Style	MODEL NUMBER
2 Inch (50 mm) 1/4-20 Spindle Output Thread	12000 RPM	Rear	Standard Lever	347RA6;12000
			Safety Lever	347RA6K;12000
	20000 RPM		Standard Lever	340RA6;20000
			Safety Lever	340RA6K;20000

RIGHT ANGLE SANDERS

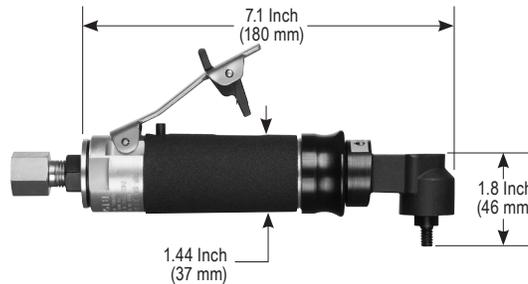

Verify the Maximum Rated Speed of the Sanding Accessory is Higher than the Maximum Rated Speed of the Tool.



0.7 H.P.
(600 W)



25 cfm
(11.8 L/s) Max



1.5 Lbs. (0.7 Kg) Aluminum
1.9 Lbs. (0.9 Kg) Steel



1/4" NPT Inlet
3/8" (10 mm) Hose Size

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

347RA/340RA Alternate Options

Case Material



Aluminum Case

Steel Case

Lever Style



Safety Lever

Standard Lever

Surface Conditioning Abrasive Mounting

