



Vertical Sanders for use with Surface Conditioning Abrasives

520V Series

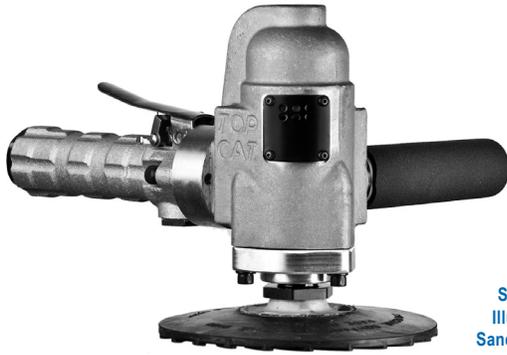

520VK;8000;SP





56S Series

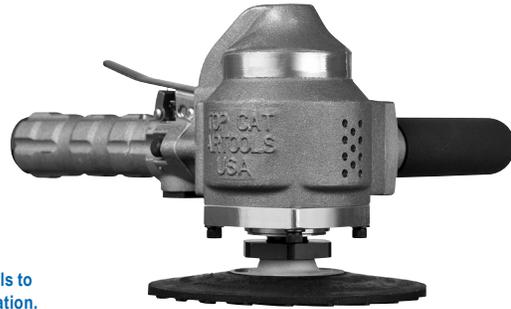

56SK;6000;SP

Sanding Pads Shown on Tools to Illustrate the Sanding Application. Sanding Accessories are Not Supplied as Standard Equipment with Tools.

Recommended Maximum Sanding Pad Size	Rated Speed	Lever Style	MODEL NUMBER	Recommended Maximum Sanding Pad Size	Rated Speed	Lever Style	MODEL NUMBER
7 Inch or 9 Inch (180 mm) (230 mm)	6000 RPM	Standard Lever	520VL;6000	7 Inch or 9 Inch (180 mm) (230 mm)	6000 RPM	Standard Lever	56SL;6000
		Safety Lever	520VK;6000			Safety Lever	56SK;6000
7 Inch (180 mm)	8000 RPM	Standard Lever	520VL;8000	7 Inch (180 mm)	8000 RPM	Standard Lever	56SL;8000
		Safety Lever	520VK;8000			Safety Lever	56SK;8000

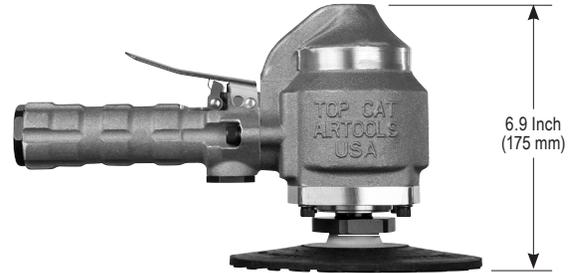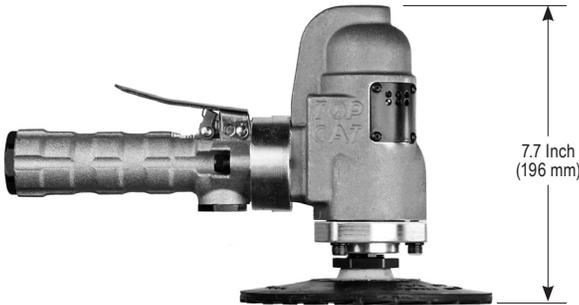

Verify the Maximum Rated Speed of the Sanding Accessory is Higher than the Maximum Rated Speed of the Tool.

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

ALTERNATE OPTIONS

Handles



Thumb Switch Safety Lever Standard Lever

ABRASIVE MOUNTING



Sanding Disc