

Vertical Grinders for use with Type 27, Type 27 Cut-Off (Type 42) & 28 Depressed Center Wheels

520V Series




520VK;8000;727

54V Series




54VK;6000;927

64V Series

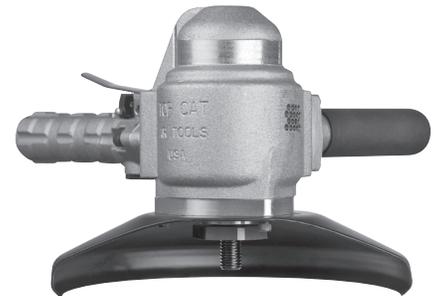

64VK;6000;927

Wheel Size	Operating Speed	Lever Style	MODEL NUMBER	Wheel Size	Operating Speed	Lever Style	MODEL NUMBER	Wheel Size	Operating Speed	Lever Style	MODEL NUMBER
7 Inch (180 mm)	8000 RPM	Standard Lever	520VL:8000;727	7 Inch (180 mm)	8000 RPM	Standard Lever	54VL:8000;727	7 Inch (180 mm)	8000 RPM	Standard Lever	64VL:8000;727
		Safety Lever	520VK;8000;727			Safety Lever	54VK;8000;727			Safety Lever	64VK;8000;727
				9 Inch (230 mm)	6000 RPM	Standard Lever	54VL:6000;927	9 Inch (230 mm)	6000 RPM	Standard Lever	64VL:6000;927
						Safety Lever	54VK;6000;927			Safety Lever	64VK;6000;927

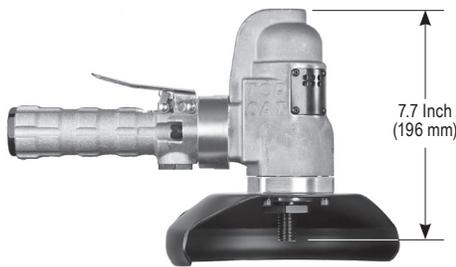


HP 2.0 H.P.
(1.5 kW)

cfm 20 cfm (9.4 L/s) Free Speed
40 cfm (18.9 L/s) Max

Lbs 7.4 Lbs.
(3.3 Kg)

SUPPLY 1/2" NPT Inlet
1/2" (13 mm) Hose Size

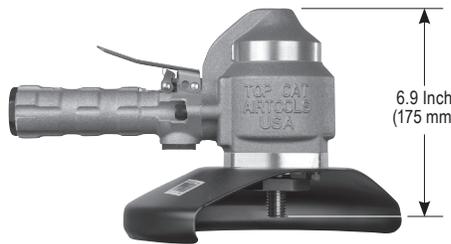

HP 3.0 H.P.
(2.3 kW)

cfm 25 cfm (18.8 L/s) Free Speed
60 cfm (28.3 L/s) Max

Lbs 9.8 Lbs.
(4.4 Kg)

SUPPLY 1/2" NPT Inlet
1/2" (13 mm) Hose Size



HP 4.0 H.P.
(3.0 kW)

cfm 25 cfm (18.8 L/s) Free Speed
75 cfm (35.4 L/s) Max

Lbs 11.3 Lbs.
(5.1 Kg)

SUPPLY 1/2" NPT Inlet
1/2" (13 mm) Hose Size



Piped Away Exhaust Available to Reduce Sound Emissions.

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

ALTERNATE OPTIONS

Operating Speed




The tools above can be rated at speeds slower than 8000 RPM when used with a 7 Inch (180 mm) wheel.

Handles



Thumb Switch Safety Lever Standard Lever

WHEEL MOUNTING



Type 27 or Type 27 Cut-Off (Type 42)

The depressed center wheel adapters are not supplied as standard equipment with the tools. If you are using a wheel that requires the adapters, they must be purchased separately.