

Short Right Angle Sanders, Buffers & Polishers for Surface Finishing Abrasives

300RA Series & 307RA Series


300RA6K;15000
307RA2K;10000;5SP

400RA Series & 407RA Series







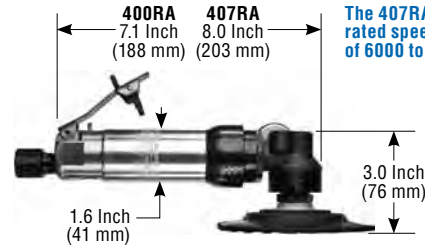
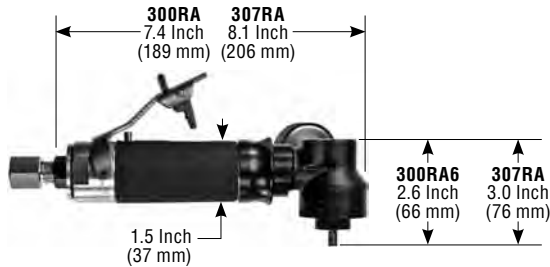

400RA2R;10000;5SP
400RA2K;10000;5SP

Sanding Pad Size	Exhaust Direction	Spindle Output	Lever Style	Model Number
3 Inch (75 mm)	Rear	1/4-20	Standard Lever	300RA6;15000
			Safety Lever	300RA6K;15000
4 Inch (100 mm)		3/8-24	Standard Lever	307RA4;10000;4SP
			Safety Lever	307RA4K;10000;4SP
4 1/2 Inch (115 mm)		5/8-11	Standard Lever	300RA2;15000;45SP
			Safety Lever	300RA2K;15000;45SP
Standard Lever	307RA2;10000;5SP			
Safety Lever	307RA2K;10000;5SP			

Sanding Pad Size	Exhaust Direction	Spindle Output	Lever Style	Model Number
4 Inch (100 mm)	Side	3/8-24	Standard Lever	400RA4;10000;4SP
			Safety Lever	400RA4K;10000;4SP
	Rear		Standard Lever	400RA4R;10000;4SP
			Safety Lever	400RA4KR;10000;4SP
4 1/2 Inch (115 mm)	Side	5/8-11	Standard Lever	410RA2;13000;45SP
			Safety Lever	410RA2K;13000;45SP
	Rear		Standard Lever	410RA2R;13000;45SP
			Safety Lever	410RA2KR;13000;45SP
5 Inch (125 mm)	Side	5/8-11	Standard Lever	400RA2;10000;5SP
			Safety Lever	400RA2K;10000;5SP
	Rear		Standard Lever	400RA2R;10000;5SP
			Safety Lever	400RA2KR;10000;5SP
Side	5/8-11	Standard Lever	407RA2;8000;5SP	
		Safety Lever	407RA2K;8000;5SP	

The 307RA is available with rated speeds within the range of 7000 to 10000 RPM.

The 407RA is available with rated speeds within the range of 6000 to 8000 RPM.



STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

300RA & 307RA Alternate Options

Case Material



Aluminum Case Steel Case

300-400RA & 307-407RA Alternate Options

Lever Style



Safety Lever Standard Lever

400RA & 407RA Alternate Options

Case Material



Aluminum Case Steel Case

Surface Conditioning Abrasive Mounting

