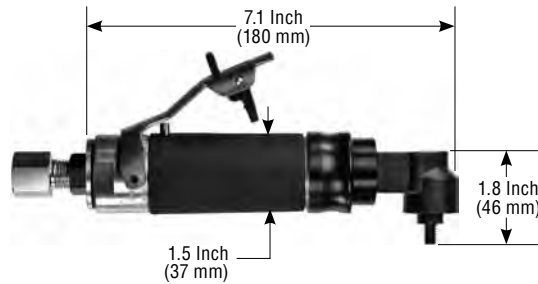


Short Right Angle Sanders, Buffers & Polishers for Surface Finishing Abrasives
330RA/340RA Series

330RA6K;12000

Maximum Sanding Pad Size	Max. Rated Speed	Exhaust Direction	Lever Style	MODEL NUMBER
2 Inch (50 mm) 1/4-20 Spindle Output Thread	12000 RPM	Rear	Standard Lever	330RA6;12000
			Safety Lever	330RA6K;12000
	20000 RPM		Standard Lever	340RA6;20000
			Safety Lever	340RA6K;20000


 0.7 H.P.
 (600 W)


 25 cfm
 (11.8 L/s) Max

 1.5 Lbs. (0.7 Kg) Aluminum
 1.9 Lbs. (0.9 Kg) Steel

 1/4" NPT Inlet
 3/8" (10 mm) Hose Size

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

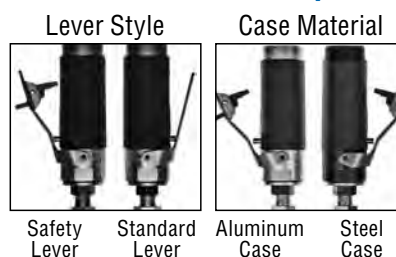330RA/340RA Alternate Options

Surface Conditioning Abrasive Mounting
