

**Geared Right Angle Sanders, Buffers & Polishers for Surface Finishing Abrasives**

**300RA(X)M Series**



**300RA3M2;4000;5SP**

**400RA(X)M Series**



**400RA3M2K;4000;7SP**


**4620RA(X)M Series**



**4620RA3M2K;4200;7SP**


**RIGHT ANGLE SANDERS**

Sanding Pad Size	Max. Rated Speed	Lever Style	SHORT RA HEAD MODEL NUMBER	Sanding Pad Size	Exhaust Direction	Max. Rated Speed	Lever Style	MODEL NUMBER	Sanding Pad Size	Exhaust Direction	Max. Rated Speed	Lever Style	MODEL NUMBER					
5 Inch (125 mm)	5200 RPM	Standard Lever	310RA3M2;5200;5SP	7 Inch (180 mm)	Side	3800 RPM	Standard Lever	410RA3M2;3800;7SP	7 Inch (180 mm)	Side	4200 RPM	Standard Lever	4620RA3M2;4200;7SP					
		Safety Lever	310RA3M2K;5200;5SP				Safety Lever	410RA3M2K;3800;7SP				Safety Lever	4620RA3M2K;4200;7SP					
	4000 RPM	Standard Lever	300RA3M2;4000;5SP			2900 RPM	Standard Lever	400RA3M2;2900;7SP			3100 RPM	Standard Lever	4620RA5M2;3100;7SP					
		Safety Lever	300RA3M2K;4000;5SP				Safety Lever	400RA3M2K;2900;7SP				Safety Lever	4620RA5M2K;3100;7SP					
	3000 RPM	Standard Lever	300RA5M2;3000;5SP			2200 RPM	Standard Lever	400RA5M2;2200;7SP			1900 RPM	Standard Lever	4620RA8M2;1900;7SP					
		Safety Lever	300RA5M2K;3000;5SP				Safety Lever	400RA5M2K;2200;7SP				Safety Lever	4620RA8M2K;1900;7SP					
	1800 RPM	Standard Lever	300RA8M2;1800;5SP			1300 RPM	Standard Lever	400RA8M2;1300;7SP			4200 RPM	Standard Lever	4620RA3M2R;4200;7SP					
		Safety Lever	300RA8M2K;1800;5SP				Safety Lever	400RA8M2K;1300;7SP				Safety Lever	4620RA3M2RK;4200;7SP					
						5/8-11 Spindle Output Thread	Rear	3800 RPM			Standard Lever	410RA3MR;3800;7SP	5/8-11 Spindle Output Thread	Rear	3100 RPM	Standard Lever	4620RA5M2R;3100;7SP	
											2900 RPM	Safety Lever				410RA3MRK;3800;7SP	Safety Lever	4620RA5M2RK;3100;7SP
								2200 RPM				Standard Lever			400RA3M2R;2900;7SP	1900 RPM	Standard Lever	4620RA8M2R;1900;7SP
											1300 RPM	Safety Lever			400RA3M2RK;2900;7SP		Safety Lever	4620RA8M2RK;1900;7SP
				2200 RPM	Standard Lever			400RA5M2R;2200;7SP										
					1300 RPM			Safety Lever	400RA5M2RK;2200;7SP									
				1300 RPM		Standard Lever	400RA8M2R;1300;7SP											
					1300 RPM	Safety Lever	400RA8M2RK;1300;7SP											

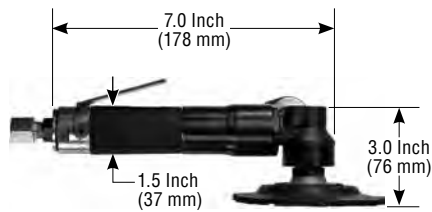


**HP** 0.7 H.P. (600 W)      **cfm** 25 cfm (11.8 L/s) Max

**Lbs** 3.6 Lbs (1.6 Kg) Aluminum  
4.0 Lbs (1.8 Kg) Steel      **SUPPLY** 1/4" NPT Inlet  
3/8" (10 mm) Hose Size

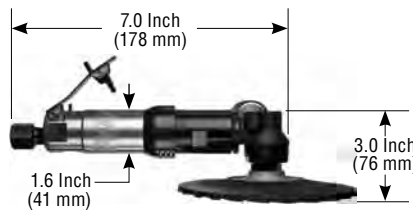

**HP** 1.2 H.P. (900 W)      **cfm** 35 cfm (16.5 L/s) Max

**Lbs** 4.5 Lbs. (2.0 Kg) Aluminum  
5.1 Lbs. (2.3 Kg) Steel      **SUPPLY** 3/8" NPT Inlet  
1/2" (13 mm) Hose Size

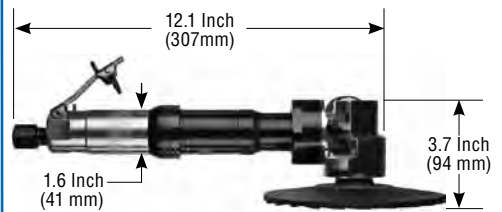


**HP** 1.2 H.P. (900 W)      **cfm** 35 cfm (16.5 L/s) Max

**Lbs** 6.3 Lbs (2.9 Kg) Aluminum  
6.9 Lbs (3.1 Kg) Steel      **SUPPLY** 3/8" NPT Inlet  
1/2" (13 mm) Hose Size

**STANDARD EQUIPMENT**

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

**300RA(X)M, 400RA(X)M & 4620RA(X)M Alternate Options**

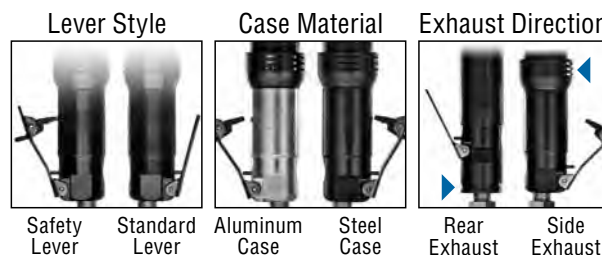

**Surface Conditioning Abrasive Mounting**

