


## Geared Horizontal Polishers/Sanders

### 300GH(X)M & 400GH(X)M Series

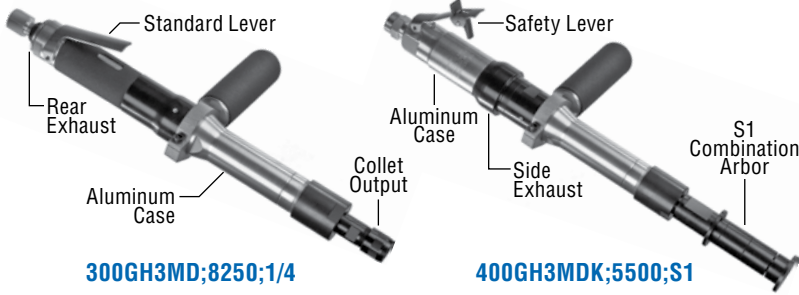

300GH3MD;8250;1/4



400GH3MDK;5500;S1

### 500H1M Series



500H1MK;4000;T5/8

		300GH(X)M Series		400GH(X)M Series					
Output	Gear Ratio/ Max. Rated Speed	Lever Style	MODEL NUMBER	MODEL NUMBER	Output	Gear Ratio/ Max. Rated Speed	Lever Style	MODEL NUMBER	
1/4 Inch Standard ER Style Insert Collet 3/8 Inch (8 mm) Maximum	3:1 (300GH3M 8250 RPM) (400GH3M 5500 RPM)	Standard Lever	300GH3MD;8250;1/4	400GH3MD;5500;1/4					
		Safety Lever	300GH3MDK;8250;1/4	400GH3MDK;5500;1/4					
	5:1 (300GH5M 6000 RPM) (400GH5M 4000 RPM)	Standard Lever	300GH5MD;6000;1/4	400GH5MD;4000;1/4					
		Safety Lever	300GH5MDK;6000;1/4	400GH5MDK;4000;1/4					
	8:1 (300GH8M 3750 RPM) (400GH8M 2500 RPM)	Standard Lever	300GH8MD;3750;1/4	400GH8MD;2500;1/4					
		Safety Lever	300GH8MDK;3750;1/4	400GH8MDK;2500;1/4					
S1 Combination Arbor 1"-4" Wide Surface Conditioning Abrasives	3:1 (300GH3M 8250 RPM) (400GH3M 5500 RPM)	Standard Lever	300GH3M;8250;S1	400GH3M;5500;S1	S1 Combination Arbor 1"-4" Wide Surface Conditioning Abrasives	4:1 (4000 RPM)	Standard Lever	500H1ML;4000;S1	
		Safety Lever	300GH3MK;8250;S1	400GH3MK;5500;S1			Safety Lever	500H1MK;4000;S1	
	5:1 (300GH5M 6000 RPM) (400GH5M 4000 RPM)	Standard Lever	300GH5M;6000;S1	400GH5M;4000;S1					
		Safety Lever	300GH5MK;6000;S1	400GH5MK;4000;S1					
	8:1 (300GH8M 3750 RPM) (400GH8M 2500 RPM)	Standard Lever	300GH8M;3750;S1	400GH8M;2500;S1					
		Safety Lever	300GH8MK;3750;S1	400GH8MK;2500;S1					
T5/8 Mounting Wheels with a 5/8-11 Thread	3:1 (300GH3M 8250 RPM) (400GH3M 5500 RPM)	Standard Lever	300GH3M;8250;T5/8	400GH3M;5500;T5/8	T5/8 Mounting Wheels with a 5/8-11 Thread	4:1 (4000 RPM)	Standard Lever	500H1ML;4000;T5/8	
		Safety Lever	300GH3MK;8250;T5/8	400GH3MK;5500;T5/8			Safety Lever	500H1MK;4000;T5/8	
	5:1 (300GH5M 6000 RPM) (400GH5M 4000 RPM)	Standard Lever	300GH5M;6000;T5/8	400GH5M;4000;T5/8					
		Safety Lever	300GH5MK;6000;T5/8	400GH5MK;4000;T5/8					
	8:1 (300GH8M 3750 RPM) (400GH8M 2500 RPM)	Standard Lever	300GH8M;3750;T5/8	400GH8M;2500;T5/8					
		Safety Lever	300GH8MK;3750;T5/8	400GH8MK;2500;T5/8					

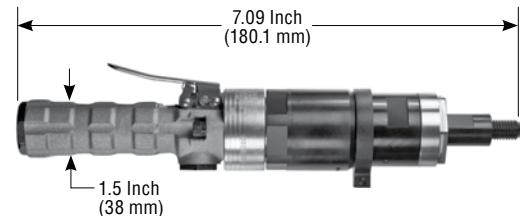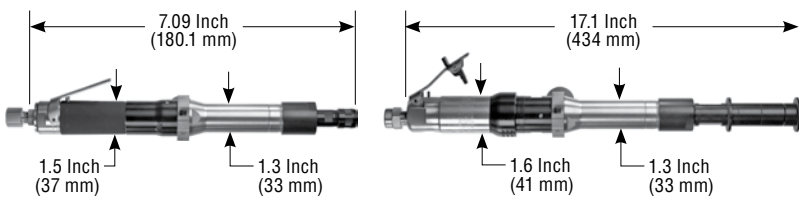

**HP** 0.7 H.P. (600 kW)  
**cfm** 25 cfm (11.8 L/s) Max

**Lbs** 3.4 Lbs. (1.5 Kg) Aluminum  
3.8 Lbs. (1.7 Kg) Steel

**SUPPLY** 1/4" NPT Inlet  
3/8" (10 mm) Hose Size

**HP** 1.2 H.P. (900 W)  
**cfm** 35 cfm (16.5 L/s)

**Lbs** 4.7 Lbs. (2.1 Kg) Aluminum  
5.4 Lbs. (2.4 Kg) Steel

**SUPPLY** 1/2" NPT Inlet  
1/2" (13 mm) Hose Size

**HP** 1.5 H.P. (1.1 kW)  
**cfm** 35 cfm (16.5 L/s) Max


**Lbs** 6.7 Lbs. (3.0 Kg)

**SUPPLY** 1/2" NPT Inlet  
1/2" (13 mm) Hose Size

### STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

### 300GH(X)M, 400GH(X)M Series Alternate Options

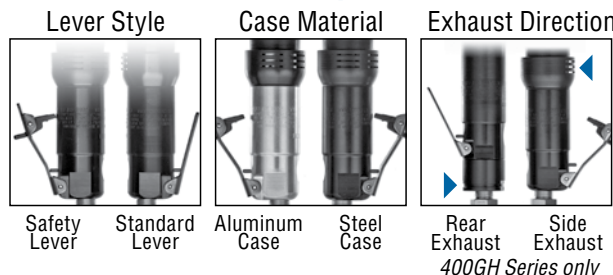

### Mounting

