


Right Angle Collet Grinders

1.2 H.P. (900 W)



Air Inlet Size: 3/8" NPT
Hose Size Recommendations: 1/2" (12.7 mm)
Extra Charge Accessories


- Safety Lever • Rear Exhaust
- Standard Equipment**
- Tool • Operating Instructions and Service Manual
- 2 Wrenches (sizes based on options)

Quick Order Number

Model Number	Collet Size	Maximum Operating Speed	Case Material	
			Aluminum	Steel
400RAD	1/4 Inch	10000 RPM	400RAD;1/4	400RAD;1/4
410RAD		13000 RPM	410RAD;1/4	410RAD;1/4

All the versions listed in the table will be supplied with a standard lever throttle (class 1). A safety lever throttle (class 2) is also available.

This chart has been provided as a means to quickly identify a particular tool. The ordering numbers listed represent the most common versions of our tools. If more specialized versions are required, please build your model number per the following model number flow chart.

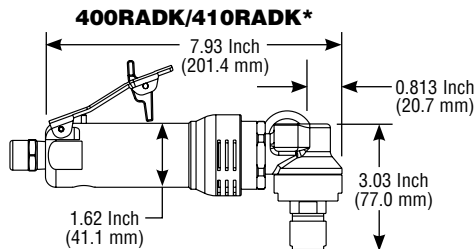

*The rear exhaust version adds 0.84 inch (21.3mm) to overall length.




1.2 H.P. (900 W)



2.8 Lb. (1.3 Kg) Aluminum
3.5 Lb. (1.6 Kg) Steel



35 cfm (16.5 L/s) Max


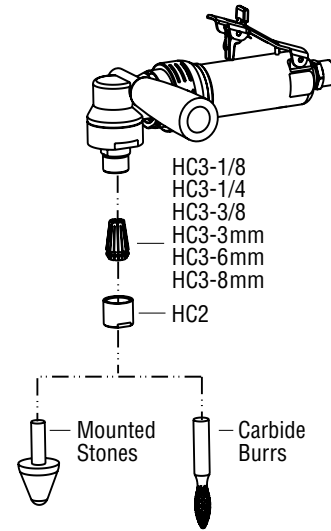


Example Model Number: **400RAD K S R ; 10000 ; 1/4**

The blue highlighted entries are shown in the Quick Reference Box above.

Model Number	Lever Style	Case Material	Exhaust Direction	Operating Speed	Collet Size
400RAD	Please choose one of the following options: No Designation - Standard Lever K - Safety Lever	Please choose one of the following options: No Designation - Aluminum Case S - Steel Case	Please choose one of the following options: No Designation - Side Exhaust R - Rear Exhaust	10000 - 10000 R.P.M.	Please choose one of the following options: 1/8 - 1/8 Inch Collet 1/4 - 1/4 Inch Collet 3MM - 3mm Collet 6MM - 6mm Collet 8MM - 8mm Collet
410RAD				13000 - 13000 R.P.M.	

Geared Tool



WARNING: Follow all recommendations from component and abrasive manufacturers for speeds and proper usage.

RIGHT ANGLE GRINDERS