

Right Angle Sanders for use with Abrasive Discs

1" (25 mm) - 2" (50 mm)
0.4 H.P. - 1.2 H.P. (300 - 900 W)



Air Inlet Size:
2601RA/3101RA: 1/4" NPT
4101RA: 3/8" NPT
Hose Size Recommendations:
2601/3101RA: 3/8" (10mm)
4101RA: 1/2" (13mm)
Extra Charge Accessories

- Safety Lever
- Standard Equipment**
- Tool with Wrench • Operating Instructions and Service Manual


- Special Features**
- Small Right Angle Head for Limited Space Sanding
 - Extended Neck for Better Reach

Quick Order Number


This chart has been provided as a means to quickly identify a particular tool. The ordering numbers listed represent the most common versions of our tools. If more specialized versions are required, please build your model number per the following model number flow chart.

Model Number	Spindle Thread	Rated Speed	Throttle Type	
			Standard Lever	Safety Lever
2601RA	1/4-20 External	30000 RPM	2601RA6	2601RA6K
3101RA		23000 RPM	3101RA6	3101RA6K
4101RA		15000 RPM	4101RA6	4101RA6K


The tools listed in this chart will be provided with an aluminum housing. Steel housing material is available. See information below for the entire spectrum of options available.



RIGHT ANGLE SANDERS, BUFFERS & POLISERS

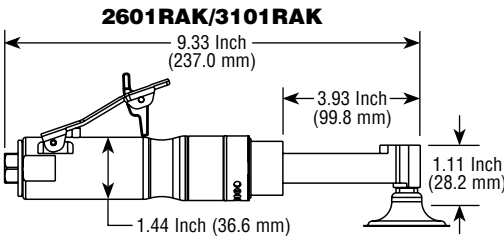

- HP** 2601RA - 0.4 H.P. (300 W)
3101RA - 0.7 H.P. (525 W)
- Lbs** Aluminum 2601RA - 1.8 Lbs. (0.8 Kg) Steel 2.3 Lbs. (1.0 Kg)
3101RA - 1.9 Lbs. (0.9 Kg) 2.4 Lbs. (1.1 Kg)
- cfm** 2601RA - 18 cfm (8.5 L/s) Max.
3101RA - 25 cfm (11.8 L/s) Max.

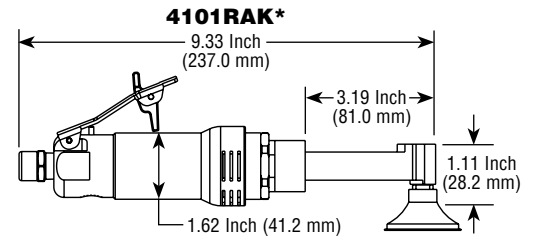


- *Rear exhaust adds 0.82 Inch (20.8mm) to overall length.
- HP** 1.2 H.P. (900 W)
- Lbs** 2.3 Lb. (1.3 Kg) Aluminum 2.8 Lb. (1.6 Kg) Steel
- cfm** 35 cfm (16.5 L/s) Max.

Example Model Number: **4101RA 6 K S R ; 15000**

Model Number	Spindle Options	Lever Style	Case Material	Exhaust Direction	Operating Speed/Sanding Pad Size
2601RA	5 - 1/4-28 Internal	Please choose one of the following options: No Designation - Standard Lever K - Safety Lever	Please choose one of the following options: No Designation - Aluminum Case S - Steel Case	Please choose one of the following options: No Designation - Side Exhaust R - Rear Exhaust	30000 - 30000 R.P.M.
3101RA	6 - 1/4-20 External				23000 - 23000 R.P.M.
4101RA	7 - 1/2-28 Internal				15000 - 15000 R.P.M.

⚙️ Geared Tool



WARNING: Follow all recommendations from component and abrasive manufacturers for speeds and proper usage.