

525 R.P.M. to 5500 R.P.M.
1.2 H.P. (900 W)

Horizontal Sanders & Polishers



Air Inlet Size: 3/8" NPT (3/8" BSP Available)
Hose Size Recommendations: 1/2" (13 mm)
Extra Charge Accessories

- Safety Lever
- Standard Equipment**
- Tool • Wheel Flange
- Wheel Nut • Wrench
- Operating Instructions and Service Manual

*The (X) is representative of gear train number (3, 5 or 8).
The outer appearance of the tool is the same regardless of the gear train number.

Quick Order Number


This chart has been provided as a means to quickly identify a particular tool. The ordering numbers listed represent the most common versions of our tools. If more specialized versions are required, please build your model number per the following model number flow chart.

Model Number	Collet Size	Rated Speed	Throttle Type	
			Standard Throttle	Safety Throttle
400HGE3M	1/4 Inch	5500 RPM	400HGE3M;1/4	400HGE3MK;1/4
400HGE5M		4000 RPM	400HGE5M;1/4	400HGE5MK;1/4
400HGE8M		2500 RPM	400HGE8M;1/4	400HGE8MK;1/4
400HGE21M		900 RPM	400HGE21M;1/4	400HGE21MK;1/4
400HGE36M		525 RPM	400HGE36M;1/4	400HGE36MK;1/4

All the versions listed in the table will be supplied with a standard lever throttle (class 1).
A safety lever throttle (class 2) is also available.



Used with Flex Shank Burrs

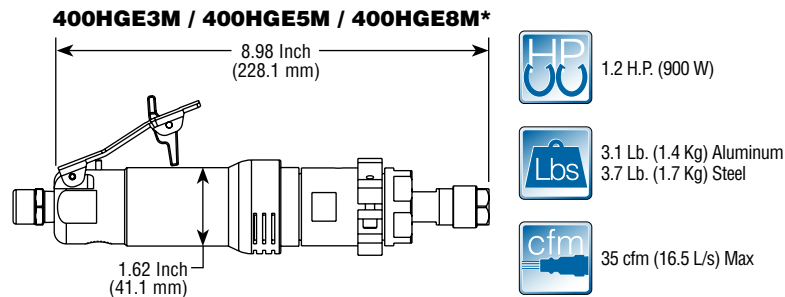


*Versions 400HGE21M & 400HGE36M add 0.51 Inch (13.0mm) to the overall length.
Rear exhaust adds 0.82 Inch (20.8mm) to overall length.

Example Model Number: **400HGE3M K S R ; 5500 ; 1/4**

The blue highlighted entries are shown in the Quick Reference Box above.

Model Number	Lever Style	Case Material	Exhaust Direction	Operating Speed	Collet Size
400HGE3M				5500 - 5500 R.P.M.	1/8 - 1/8 Inch
400HGE5M	Please choose one of the following options:	Please choose one of the following options:	Please choose one of the following options:	4000 - 4000 R.P.M.	1/4 - 1/4 Inch
400HGE8M	No Designation - Standard Lever	No Designation - Aluminum Case	No Designation - Side Exhaust	2500 - 2500 R.P.M.	3/8 - 3/8 Inch
400HGE21M	K - Safety Lever	S - Steel Case	R - Rear Exhaust	900 - 900 R.P.M.	3MM - 3 mm
400HGE36M				525 - 525 R.P.M.	6MM - 6 mm
					8MM - 8 mm

⚙️ Geared Tool



WARNING: Follow all recommendations from component and abrasive manufacturers for speeds and proper usage.