



## Vertical Grinders for use with Cup Wheels

4" (100 mm) – 6" (150 mm) Type 6 or 11 Wheels  
2-4 H.P. (1500–3000 W)

VERTICAL GRINDERS



**Air Inlet Size: 1/2" NPT**  
**Hose Size Recommendations: 1/2" (13 mm)**  
**Arbor Size: 5/8 x 11**


### Standard Equipment

- Tool with Wheel Guard of Choice
- Operating Instructions and Service Manual
- Wrench


### Quick Order Number

Model Number	Guard Size	Maximum Operating Speed	Throttle Handle Type	
			Standard	Safety
520V	4 Inch	8000 RPM	520VXL;411	520VXK;411
58C	6 Inch	6000 RPM	58CL;611	58CK;611
68C	6 Inch		68CL;611	68CK;611


This chart has been provided as a means to quickly identify a particular tool. The ordering numbers listed represent the most common versions of our tools. If more specialized versions are required, please build your model number per the following model number flow chart.

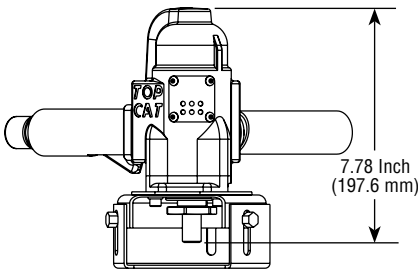

**520V Series**

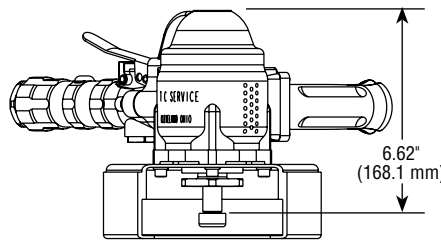

**58C Series**

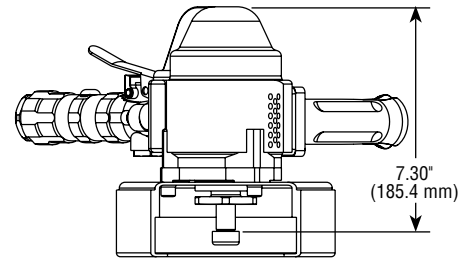

**68C Series**



2.0 H.P.  
(1500 W)



6.7 Lb.  
(3.0 Kg)



20 cfm (9.4 L/s) Free Speed  
40 cfm (18.9 L/s) Max



3.0 H.P.  
(2250 W)



8.8 Lb.  
(3.9 Kg)



25 cfm (11.8 L/s) Free Speed  
60 cfm (28.3 L/s) Max



4.0 H.P.  
(3000 W)



11.0 Lb.  
(5.0 Kg)



25 cfm (11.8 L/s) Free Speed  
75 cfm (35.4 L/s) Max

Example Model Number: **58C L ; 6000;611**

Model Number	Lever Style	Operating Speed/Guard Size
520V	Please choose one of the following options: K - Safety Lever XL - Standard Lever XK - Safety Lever XB - Thumb Switch XLTK - Turned/Knurled Standard Lever XKTK - Turned/Knurled Safety Lever XBTK - Turned/Knurled Thumb Switch XLTKW - Turned/Knurled/Cushioned Standard Lever XKTKW - Turned/Knurled/Cushioned Safety Lever XBTKW - Turned/Knurled/Cushioned Thumb Switch	8000;411 - 8000 R.P.M. with 4 Inch T11 Guard
58C	Please choose one of the following options: L - Standard Lever K - Safety Lever B - Thumb Switch LTK - Turned/Knurled Standard Lever KTK - Turned/Knurled Safety Lever BTK - Turned/Knurled Thumb Switch LTKW - Turned/Knurled/Cushioned Standard Lever KTKW - Turned/Knurled/Cushioned Safety Lever BTKW - Turned/Knurled/Cushioned Thumb Switch	Please choose one of the following options: 6000;611 - 6000 R.P.M. with 6 Inch T11 Guard 7000;511 - 7000 R.P.M. with 5 Inch T11 Guard 8000;411 - 8000 R.P.M. with 4 Inch T11 Guard
68C	Please choose one of the following options: LTKW - Turned/Knurled/Cushioned Standard Lever KTKW - Turned/Knurled/Cushioned Safety Lever BTKW - Turned/Knurled/Cushioned Thumb Switch	Please choose one of the following options: 6000;611 - 6000 R.P.M. with 6 Inch T11 Guard 7000;511 - 7000 R.P.M. with 5 Inch T11 Guard

