

3/8" or 1/2" Drill Chucks
1.2 H.P. (900 W)


Right Angle Drills



*The (X) is representative of gear train number (3, 5 or 8).
The outer appearance of the tool is the same regardless of the gear train number.

Air Inlet Size: 3/8" NPT
Hose Size Recommendations: 1/2" (13 mm)
Extra Charge Accessories

- Safety Lever
- Standard Equipment**
- Tool • Operating Instructions and Service Manual • Chuck Key

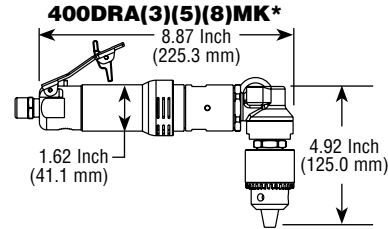


1.2 H.P.
(900 W)



4.9 Lb. (2.2 Kg) Aluminum
5.5 Lb. (2.5 Kg) Steel



35 cfm (16.5 L/s) Max

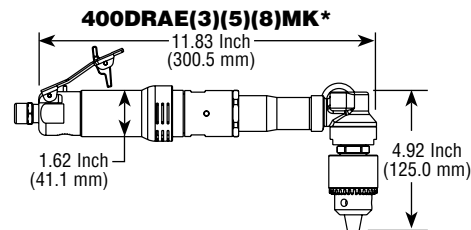

1.2 H.P.
(900 W)



5.4 Lb. (2.4 Kg) Aluminum
6.0 Lb. (2.7 Kg) Steel



35 cfm (16.5 L/s) Max

*Rear exhaust adds 0.82 Inch (20.8mm) to overall length.
Versions with 2 planetary gear systems (21) & (36) add 0.52 Inch (13.2 mm) to overall length.

Quick Order Number

This chart has been provided as a means to quickly identify a particular tool. The ordering numbers listed represent the most common versions of our tools. If more specialized versions are required, please build your model number per the following model number flow chart.

Model Number	Chuck Size	Maximum Operating Speed	Throttle Handle Type	
			Standard Lever	Safety Lever
400DRA	3/8"	2700 RPM	400DRA3M;3/8	400DRA3MK;3/8
		2000 RPM	400DRA5M;3/8	400DRA5MK;3/8
		1200 RPM	400DRA8M;3/8	400DRA8MK;3/8
		440 RPM	400DRA21M;3/8	400DRA21MK;3/8
		260 RPM	400DRA36M;3/8	400DRA36MK;3/8
	1/2"	2700 RPM	400DRA3M;1/2	400DRA3MK;1/2
		2000 RPM	400DRA5M;1/2	400DRA5MK;1/2
		1200 RPM	400DRA8M;1/2	400DRA8MK;1/2
		440 RPM	400DRA21M;1/2	400DRA21MK;1/2
		260 RPM	400DRA36M;1/2	400DRA36MK;1/2


The tools listed in this chart will be provided with an aluminum housing. Steel housing material is available. See information below for the entire spectrum of options available.

Example Model Number: **400DRA3M K S R ; 2700 ; 1/2**

The blue highlighted entries are shown in the Quick Reference Box above.

Model Number	Lever Style	Case Material	Exhaust Direction	Operating Speed	Drill Chuck Size
400DRA3M				2700 - 2700 R.P.M.	Please choose one of the following options: 3/8 - 3/8 Inch 1/2 - 1/2 Inch
400DRA5M				2000 - 2000 R.P.M.	
400DRA8M				1200 - 1200 R.P.M.	
400DRA21M				440 - 440 R.P.M.	
400DRA36M				260 - 260 R.P.M.	
400DRAE3M	No Designation - Standard Lever	No Designation - Aluminum Case	No Designation - Side Exhaust	2700 - 2700 R.P.M.	
400DRAE5M	K - Safety Lever	S - Steel Case	R - Rear Exhaust	2000 - 2000 R.P.M.	
400DRAE8M			F - Front Exhaust	1200 - 1200 R.P.M.	
400DRAE21M				440 - 440 R.P.M.	
400DRAE36M				260 - 260 R.P.M.	

⚙️ Geared Tool



WARNING: Comply with the speed recommendation of component and bit manufacturers.